



technical data

FIBERLAUNCH ECO

The Fiberlaunch ECO is a new development of an easy to use FO launch cable on an economic price level

It is available for all kinds of connectors and fibres (SM OS2, OM1, OM2, OM3 and OM4) up to 300m

Our Fiberlaunch ECO is a high-end product with corning fibres and HQ Connectors for high-level proficiency

To each assembled Fiberlaunch ECO we provide a measurement protocol (IL, RL)




FIBERLAUNCH ECO	SINGLEMODE	MULTIMODE
length	100m, 150m, 200m, 300m	100m, 150m, 200m, 300m
fiber	Corning SMF 28 Ultra ITU-T: G.652.D G.657.A1	Corning Infinicore OM1, OM2, OM3, OM4
wavelength	1310nm - 1650nm	850nm, 1300nm
attenuation/km	max. -0,3dB	max.-0,9dB
connector	SC, LC, E2000, FCPC - also in APC	SC, LC, ST, FCPC
attenuation/connector	IL < -0,15 dB RL UPC >50dB, APC >65dB	ILdB < 0,20dB RL >30dB
mating cycles	min. 1000 cycles	min. 1000 cycles



[purchase information](#)

FL-ECO-XXX-XX/X-XX/X-XXX

fiber								polish A = APC
OS2 = SM							connector B FC = FC-PC SC = SC LC = LC E2 = E2000 ST = ST	
OM1 = 62,5/125								
OM2 = 50/125								
OM3 = OM3								
OM4 = OM4								
connector A FC = FC-PC SC = SC LC = LC E2 = E2000 ST = ST							length 100 = 100m 150 = 150m 200 = 200m 300 = 300m	

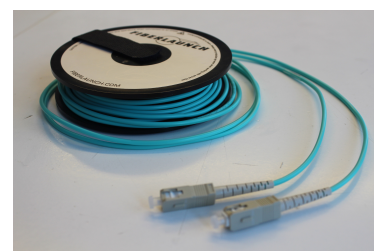

FIBERLAUNCH distributor of your country: